


Manual Operated Light Louvers

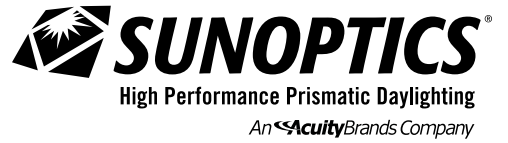


Frame Model 900

KEY FEATURES

Manual light control

PRODUCT PROFILE

Details (Scale: 3" = 1'-0")

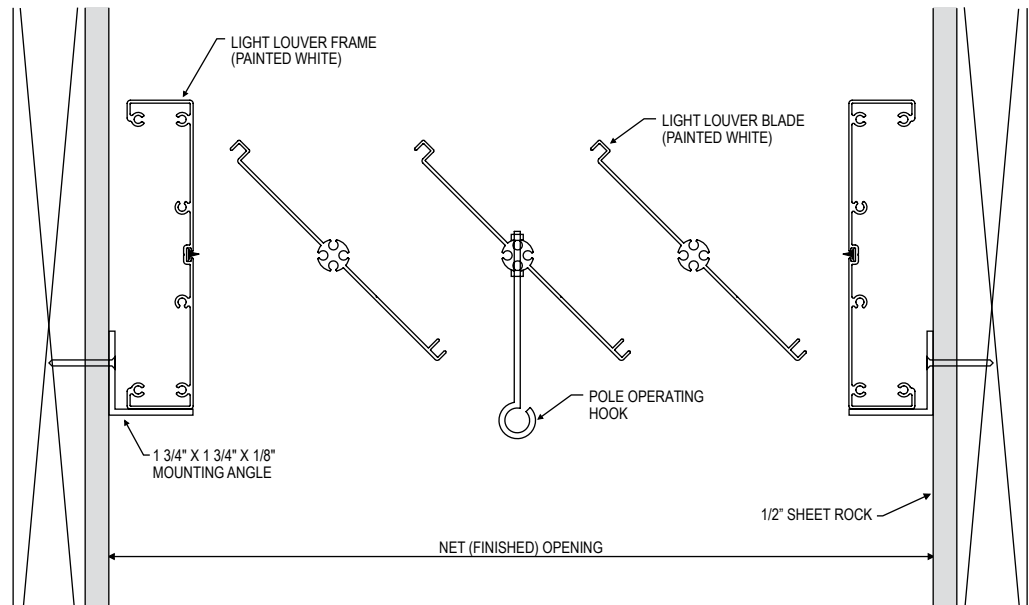

SPECIFICATIONS


Light Control Louvers shall be Sunoptics model 900 manually operated as manufactured by Sunoptics Skylights, 6201 27th Street, Sacramento Ca. 95822 916/395-4700

Louvers shall be factory assembled, ready for installation.

Louver frame and blades shall be fabricated from 6063-T5 aluminum, finish to be baked on enamel, white in color.

Louver frames shall be mechanically joined at the corners. Blades shall be 6" on center, rotating on a 5/8" rigid PVC bearing. Aluminum end plates shall be fastened to the ends of each blade and act as thrust caps against the PVC bearing. End plates shall be attached to an aluminum bar on 1 side for gang operation.

Louvers shall be equipped with an eye hook rod, mounted to 1 blade for pole operation.



Manual Operated Light Louvers

Frame Model 900

ORDERING LOGIC

Fixture	ID Curb Dimensions	Motor Location
LVR Louver	2020 23" x 23"	NONE Manual Control (No Motor)
	2020E 24-3/8" x 24-3/8"	
	2030 23" x 35"	
	2030E 24-3/8" x 36-3/8"	
	2040 23" x 47"	
	2040E 24-3/8" x 48-3/8"	
	2060 23" x 71"	
	2060E 24-3/8" x 72-3/8"	
	2080 23" x 95"	
	2080E 24-3/8" x 96-3/8"	
	3030 35" x 35"	
	3030E 36-3/8" x 36-3/8"	
	3040 35" x 47"	
	3040E 36-3/8" x 48-3/8"	
	3060 35" x 71"	
	3060E 36-3/8" x 72-3/8"	
	3080 35" x 95"	
	3080E 36-3/8" x 96-3/8"	
	4040 47" x 47"	
	4040E 48-3/8" x 48-3/8"	
	4060 47" x 71"	
	4060E 48-3/8" x 72-3/8"	
	4080 48" x 96"	
	4080E 49-3/8" x 97-3/8"	
	5060 59-3/8" x 71-3/8"	

