


Flat Style Triple Glazed Fixed Skylights

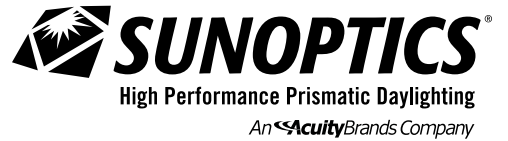


Frame Model 800MD

KEY FEATURES

Residential Use
For Excessive Roof Pitch Application
Bronze or Mill Finish

PRODUCT PROFILE

Details Not To Scale

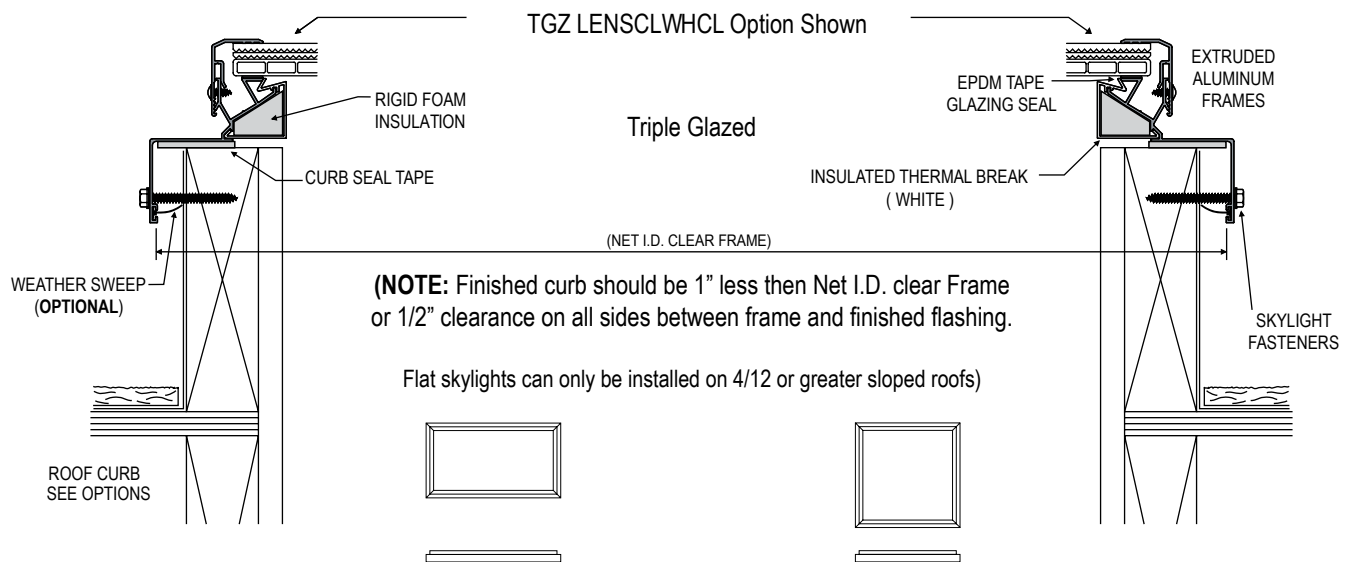

SPECIFICATIONS

Skylights shall be Sunoptics model 800MD (curb mounted) as manufactured by Sunoptics Skylights, 6201 27th Street, Sacramento Ca. 95822 916/395-4700

Skylights shall be glazed ready for installation.

Skylight frames shall be fabricated from 6063 T6 aluminum, finish as specified by architect. Frames shall have integral condensation and weepage gutters which drain interior moisture to the outside. Corners shall be mitered and welded. Skylight frames shall be insulated and thermally broken. The acrylic glazing shall be separated from the skylight frame with an EPDM rubber air seal gasket.

Note: Multi-glazed units default to include Insulated Thermal Break (ITBR), CTape, Weather Sweep (WSW) and screws. Single-glazed units default to not included any of these options.

Skylights shall be Triple glazed using 50% Impact Modified Clear prismatic outer lens over White prismatic inner lens over Clear double wall acrylic lower lens, CC2 acrylic, glazed in a flat configuration. (Requires Minimum 4" on 12" slope roof.)

ORDERING LOGIC

Flat Style Triple Glazed Skylights

<u>Fixture</u>	<u>Inside Frame Dimensions</u>	<u>Glazing</u>	<u>Lens Material</u>	<u>Lens Colors</u>
RES Residential Flat	1414 18-5/8" x 18-5/8" 1420 18-5/8" x 26-5/8" 1430 18-5/8" x 38-5/8" 1440 18-5/8" x 50-5/8" 2020 26-5/8" x 26-5/8" 2030 26-5/8" x 38-5/8" 2040 26-5/8" x 50-5/8" 2060 26-5/8" x 74-5/8" 2080 26-5/8" x 98-5/8" 2828 34-5/8" x 34-5/8" 2840 34-5/8" x 50-5/8" 3030 38-5/8" x 38-5/8" 3040 38-5/8" x 50-5/8" 3060 38-5/8" x 74-5/8" 3080 38-5/8" x 98-5/8" 4040 50-5/8" x 50-5/8" 4060 50-5/8" x 74-5/8" 4080 50-5/8" x 98-5/8"	TGZ Triple Glaze	50CC2 50% IM Acrylics	LENSWHWHWH White White White LENSCLCLCL Clear Clear Clear LENSCLWHCL Clear White Clear (Triple Glaze Default) LENSWHCLWH White Clear White LENSCLWHWH Clear White White LENSWHCLCL White Clear Clear

Use CUST for Custom sized units.

<u>Unit Type</u>	<u>Skylight Frame Finish</u>	<u>Options</u>	<u>Curb Type</u>
800MD Standard Frame (Default)	MI Mill (Default) WH White BZ Bronze CF Custom	(blank) No Options ITBR Insulated Thermal break NITBR No Insulated Thermal Break WSW Weather Sweep NWSW No Weather Sweep NOSCREW No Installation Screw	NOCURB No Curb on the Order

